SYMBOLS LEGEND

DESCRIPTION	SYMBOL
DRAWING BLOCK TITLE MARK	
WALL SECTION MARK	
BUILDING SECTION MARK	
DETAIL INDICATOR	
EXTERIOR ELEVATION MARK	
INTERIOR ELEVATION MARK	
NORTH ARROW	
ROOM NAME INDICATOR	
COLUMN GRID IDENTIFICATION	
DOOR IDENTIFICATION	
WINDOW IDENTIFICATION	
WALL TYPE IDENTIFICATION	
KEYNOTE IDENTIFICATION	
REVISION IDENTIFICATION	
DATUM POINT IDENTIFICATION	

ABBREVIATIONS

ACT	SUSPENDED ACOUSTICAL PANEL CEILING
AFF	ABOVE FINISHED FLOOR
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE
ASTM	AMERICAN SOCIETY FOR TESTING AND MATERIALS
CJ	CONTROL/ CONSTRUCTION JOINT
CL	CENTERLINE
CMU	CONCRETE MASONRY UNIT
CO	CLEANOUT
CONC	CONCRETE
CPT	CARPET
CT	CERAMIC TILE, CURTAIN TRACK
DIA	DIAMETER
ELEV	ELEVATOR, ELEVATION
EPDM	ETHYLENE PROPYLENE DIENE MONOMER
EWC	ELECTRIC WATER COOLER
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FF	FINISHED FLOOR
GA	GAGE, GAUGE
GYP BD	GYPSUM BOARD
HCP	HANDICAP, HANDICAPPED
HDPE	HIGH DENSITY POLYETHYLENE
HM	HOLLOW METAL
HVAC	HEATING, VENTILATING, AND AIR CONDITIONING
IBC	INTERNATIONAL BUILDING CODE
JAN	JANITOR
MIN	MINIMUM
MJ	MOVEMENT JOINT
N/A	NOT APPLICABLE
OC	ON CENTER
P-LAM	PLASTIC LAMINATE
RD	ROOF DRAIN
RTU	ROOF TOP UNIT
RWC	RAIN WATER CONDUCTOR
SF	SQUARE FOOT/ FEET
SIM	SIMILAR
SUSP	SUSPENDED
TB	TACKBOARD
PROJ	PROJECTOR
TOS	TOP OF STEEL
TPO	THERMOPLASTIC POLYOLEFIN
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
VCT	VINYL COMPOSITION TILE

MATERIALS LEGEND

- BATT INSULATION
- FACE BRICK
- CONCRETE
- CONCRETE MASONRY UNITS (CMU)
- EARTH - COMPACTED FILL
- GRAVEL, CRUSHED STONE
- GYPSUM BOARD, PLASTER
- PLYWOOD
- RIGID INSULATION
- SAND, GROUT, LIMESTONE
- STEEL
- FINISHED WOOD TRIM
- WOOD FRAMING (THROUGH MEMBER)

GENERAL PROJECT NOTES

1. ALL CONSTRUCTION WORK SHALL CONFORM WITH THE APPLICABLE CODE AND ORDINANCES OF THE BOROUGH OF MADISON, MORRIS COUNTY, THE STATE OF NEW JERSEY, THE 2019 UNIFORM CONSTRUCTION CODE AND THE 2018 INTERNATIONAL BUILDING CODE, THE CONTRACTOR SHALL POST NOTICES AND COMPLY WITH THE GOVERNING LAWS OF THE JURISDICTION.
2. CONTRACT DRAWINGS AND SPECIFICATIONS ARE COMPLIMENTARY. WHERE DISCREPANCIES ARE FOUND BETWEEN THE TWO, NOTIFY THE ARCHITECT AND SEEK CLARIFICATION PRIOR TO PROCEEDING WITH THE WORK OR PROVIDING A BID. FOR DISCREPANCIES DURING THE BIDDING PHASE WHEN A CLARIFICATION IS NOT AVAILABLE, THE MORE EXTENSIVE AND/ OR MORE EXPENSIVE DETAIL OR REQUIREMENT SHALL BE INCLUDED IN THE BID.
3. THE CONTRACTOR SHALL, AT ALL TIMES, MAINTAIN ADEQUATE PROTECTION TO SAFEGUARD THE OWNER, BUILDING OCCUPANTS, AND ALL PERSONS ENGAGED IN THE PERFORMANCE OF THE WORK.
4. THE CONTRACTOR SHALL VERIFY ALL GRADES, LINES, LEVELS, AND DIMENSIONS INDICATED WITHIN THE CONTRACT DOCUMENTS AND SHALL REPORT ANY INCONSISTENCIES TO THE ARCHITECT PRIOR TO COMMENCEMENT OF THE WORK. FIELD VERIFY ALL DIMENSIONS PRIOR TO ORDERING MANUFACTURED AND/ OR FABRICATED ITEMS.
5. PLAN DIMENSIONS, UNLESS NOTED OTHERWISE, ARE TO THE FACE OF STUD WALL FRAMING (NOT WALL FINISH), FACE OF MASONRY, OR CENTERLINE OF COLUMN GRID.
6. ALL PLAN INDICATIONS OF MASONRY, METAL STUDS, AND GYPSUM BOARD ARE ACTUAL DIMENSIONS (NOT NOMINAL), UNLESS NOTED OTHERWISE.
7. THE CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR THE PROTECTION AND SAFEKEEPING OF MATERIALS UNDER THIS CONTRACT, WHETHER STORED ON OR OFF SITE. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER ON PREFERRED LOCATIONS FOR STORED MATERIALS ON SITE AND SHALL PROVIDE PROOF OF INSURANCE AND INVOICES FOR MATERIALS STORED OFF SITE .
8. THE CONTRACTOR SHALL MAINTAIN AREAS UNDER THEIR CONTROL FREE OF WASTE MATERIALS. THE CONTRACTOR SHALL PROVIDE WASTE CONTAINERS FOR DEPOSIT OF WASTE MATERIALS AND SHALL PERIODICALLY DISPOSE OF WASTE OFF SITE. COORDINATE LOCATION OF CONTAINERS WITH THE OWNER PRIOR TO PLACEMENT. AT THE CONCLUSION OF THE PROJECT, ALL UNUSED FILL, SOD, AND TOPSOIL SHALL BECOME THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE REMOVED FROM THE SITE.
9. ALL WOOD FRAMING, BLOCKING, AND SHEATHING SHALL BE FIRE RETARDANT TREATED AS REQUIRED BY THE BUILDING CODE CLASSIFICATION OF 'NONCOMBUSTIBLE'.
10. DO NOT SCALE DRAWINGS. ANY ADDITIONAL/ MISSING DIMENSIONS WILL BE PROVIDED BY THE ARCHITECT UPON REQUEST FROM THE CONTRACTOR.
11. WHERE APPLICABLE, PROVIDE SPLIT FACE CMU CORNER BLOCKS AT ALL OUTSIDE CORNERS, TYP.
12. WHERE APPLICABLE, PROVIDE GROUND FACE CMU CORNER BLOCKS AT ALL OUTSIDE CORNERS, TYP.

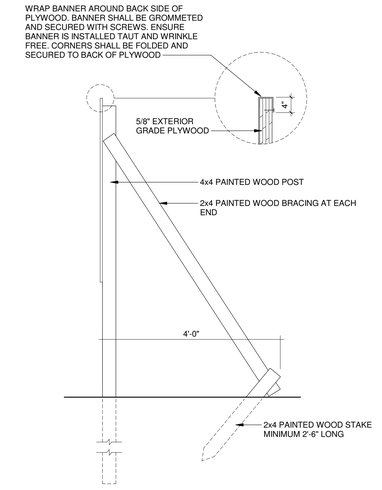

SECTION VIEW

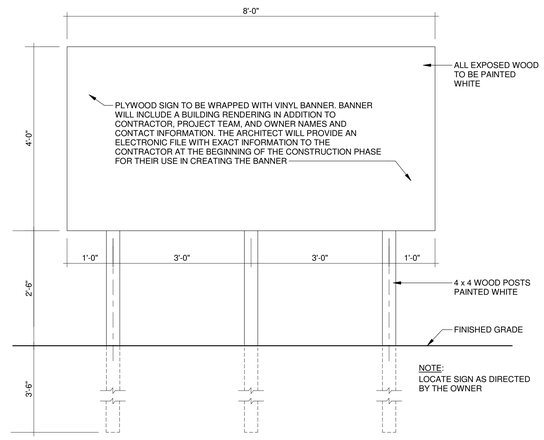

ELEVATION VIEW

1 PROJECT SIGN

3/4" = 1'-0"

STATE OF NEW JERSEY
GEOFFREY L. COGAN
21AI00865600
REGISTERED ARCHITECT

GEOFFREY L. COGAN
Architect, Planner, A.I.A. NJ CERT 21AI00865600
6 KING STREET, STE A, MORRISTOWN, N.J. 07960 OFF (973) 267-0291 FAX (973) 975-2454
E-MAIL GCOGAN@AOL.COM

DERCK & EDSON EST 1960
CAMPUSES DOWNTOWNS ATHLETICS
33 SOUTH BROAD STREET, LITITZ PA 17543
301 N SPRING STREET, SUITE 203, BELLEFONTE PA 16823
WWW.DERCKANDEDSON.COM (717) 626-2004

NOTES, SYMBOLS, AND ABBREVIATIONS

AMENDED PRELIMINARY / FINAL SITE DEVELOPMENT PLAN

FAIRLEIGH DICKINSON ATHLETIC FIELDS

FAIRLEIGH DICKINSON UNIVERSITY

LOT 6 / BLOCK 101 - ZONE: UNIVERSITY
285 MADISON AVENUE, MADISON, NJ 07940
MADISON BOROUGH, MORRIS COUNTY, NEW JERSEY

REVISIONS:

No.	DATE	DESCRIPTION OF CHANGES

DATE: 03/06/2020
PROJECT #: 190450
DRAWN BY: JFW
PM: JLL
PIC: SBS

DRAWING NO.

G-002

4/16/2020 10:58:11 AM