




**STANDARD ROOFING SECTION**  
SCALE: 3" = 1'-0"

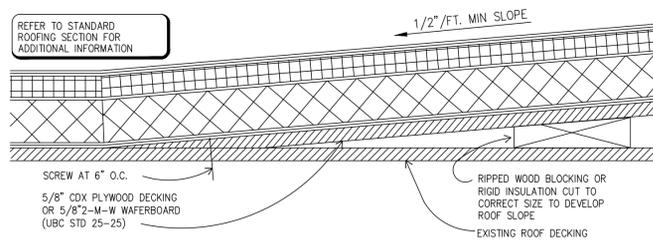


**TYPICAL CRICKET DETAIL**  
SCALE: 3" = 1'-0"

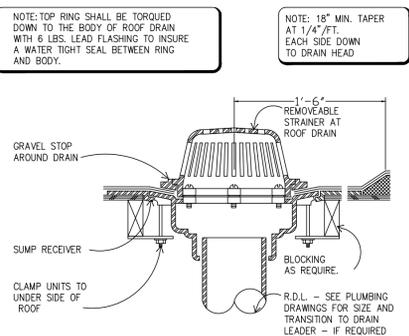

**TYPICAL ROOF DRAIN**  
SCALE: NONE

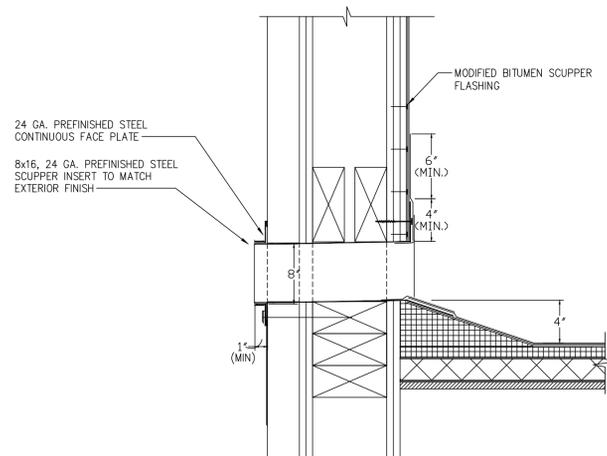

**OVERFLOW SCUPPER DRAIN DETAIL**  
SCALE: NONE

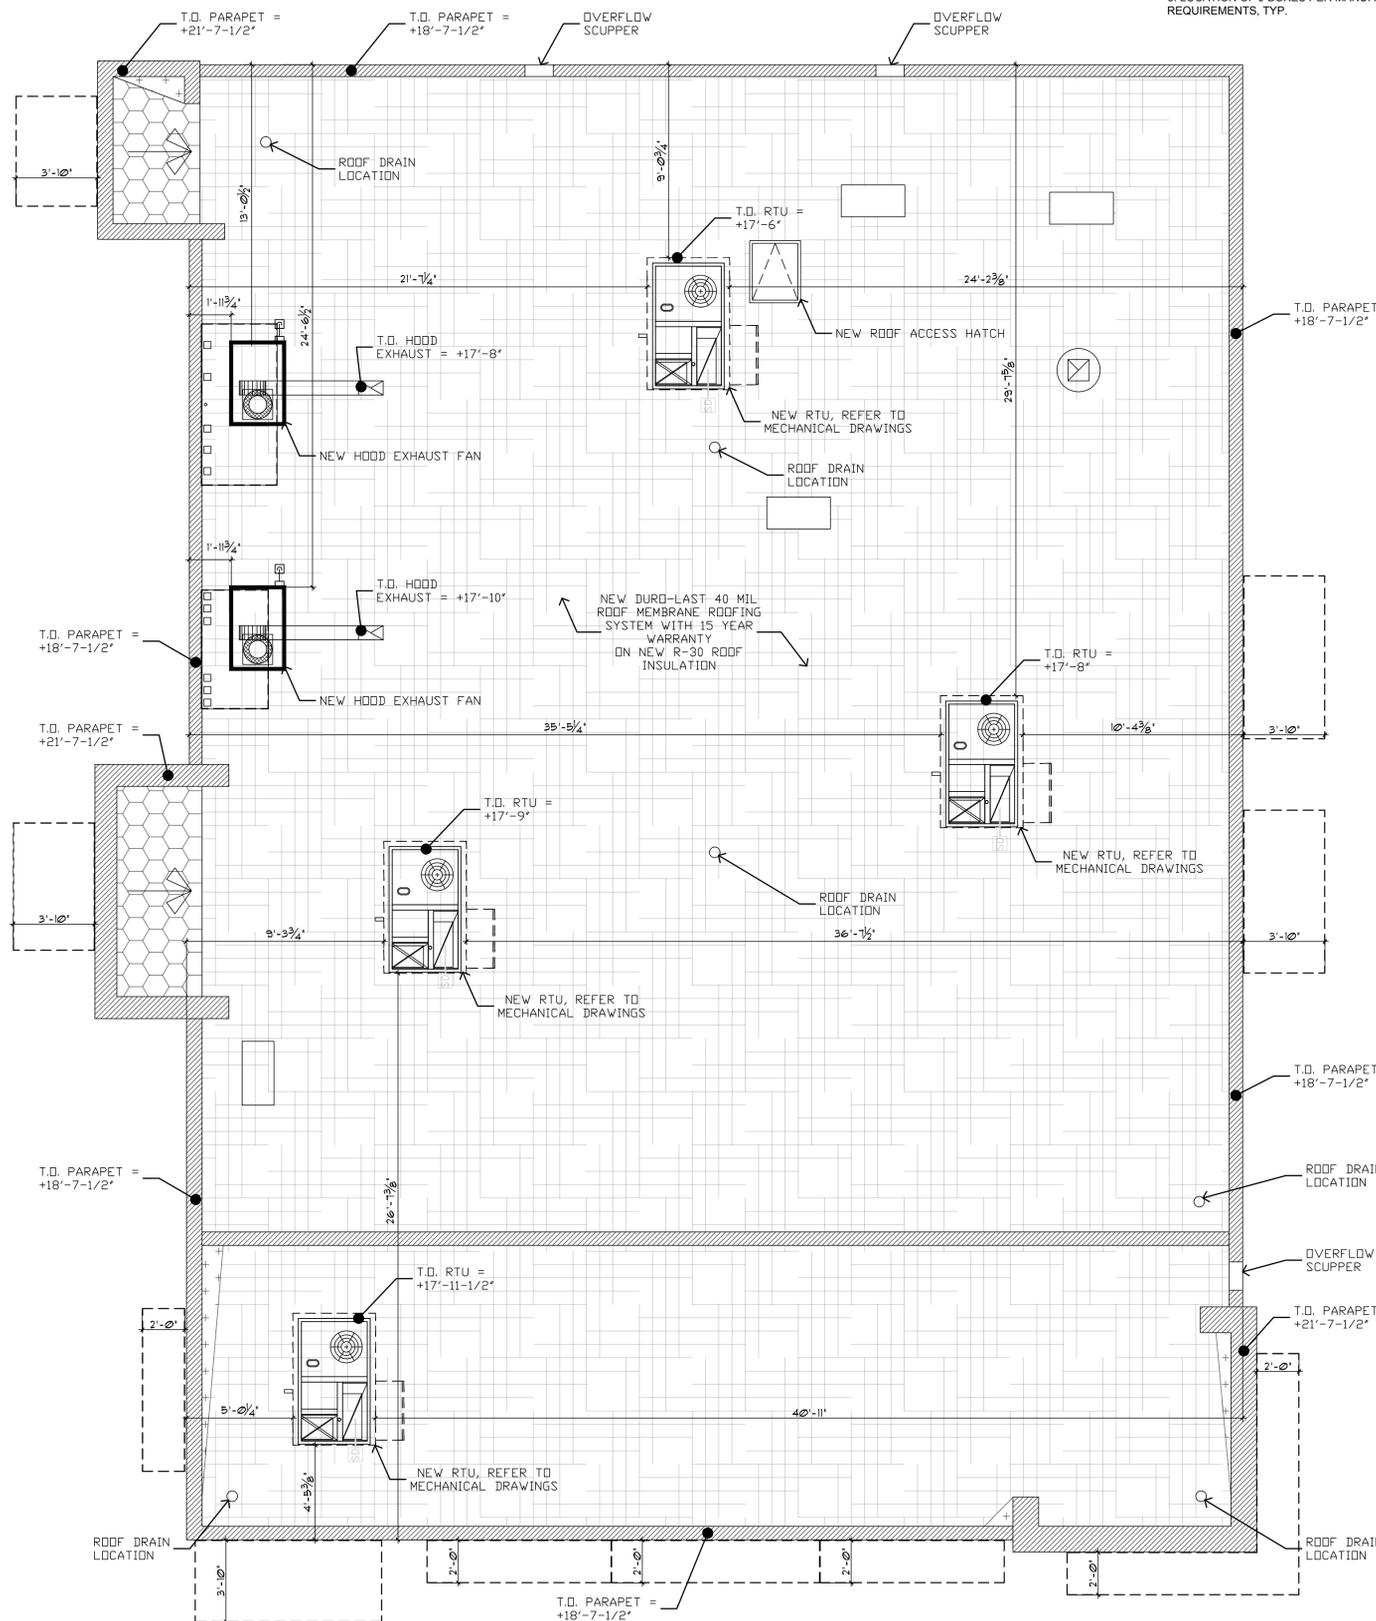

**ROOF PLAN**  
SCALE: 1/4" = 1'-0"

**PARAPET LIGHT BAND / SIGNAGE NOTES**

- G.C. TO VERIFY POINT OF CONNECTION AND CIRCUITING REQUIREMENTS FOR THE LIGHT BAND WITH THE SIGNAGE MANUFACTURER.
- LIGHT BAND DIMENSIONS TO BE VERIFIED IN FIELD BY SIGNAGE MANUFACTURER.
- LOCATION OF J-BOXES PER MANUFACTURER'S REQUIREMENTS, TYP.

**GENERAL ROOF NOTES**

- EXISTING ROOF DRAINS TO REMAIN. PROVIDE NEW TAPERED INSULATION CRICKETS FOR POSITIVE DRAINAGE THROUGHOUT, TYP.
- PROVIDE RECOMMENDED MAINTENANCE CLEARANCES FOR ALL EXISTING ROOFTOP UNITS, VENTS, EXHAUST FANS, ETC.
- REFER TO 'ROOF TYPES' ON THIS SHEET FOR ADDITIONAL ROOF INFORMATION, TYP.
- THE CONTRACTOR IS RESPONSIBLE TO MAINTAIN WATER-TIGHT CONDITIONS AT ALL ROOF AREAS AT ALL TIMES.
- G.C. TO VERIFY CONDITION OF EXISTING MEMBRANE ROOFING SYSTEM TO REMAIN IN FIELD, TYP.

**ROOF TYPE LEGEND**

- NEW PRE-FINISHED METAL COPING & FULLY ADHERED MEMBRANE ROOFING SYSTEM WITH REINFORCED FLASHING MEMBRANE STRIP; REFER TO SECTION DRAWINGS
- NEW 4" THICK MIN. POLYSTYRENE TAPERED INSULATION CRICKET W/ FULLY ADHERED MEMBRANE ROOFING SYSTEM. LAP MEMBRANE WITH EXISTING ROOFING SYSTEM PER MANUFACTURER'S SPECIFICATIONS, TYP.
- NEW FULLY ADHERED DURO-LAST MEMBRANE ROOFING SYSTEM ON NEW PLYWOOD CANTS. USE 5/8" EXTERIOR GRADE FIRE TREATED TONGUE & GROOVE PLYWOOD FOR ALL CANTS, TYP. LAP MEMBRANE WITH EXISTING ROOFING SYSTEM PER MANUFACTURER'S SPECIFICATIONS. ALTERNATE: USE SIMPSON STONG-TIE PSL/PSCA PANEL SHEATHING CLIPS IN PLACE OF TONGUE & GROOVE PLYWOOD IN ROOF CANTS. INSTALL AT 12" O.C., TYP.
- NEW MECHANICALLY FASTENED DURO-LAST MEMBRANE ROOFING SYSTEM ON NEW RIGID INSULATION ON EXISTING ROOF DECKING.

CLS# 1032 BK# 1366

-	REISSUED FOR PLANNING REVIEW	06.18.20
-	ISSUED FOR PLANNING REVIEW	04.21.20
3	PER OWNER COMMENTS	03.24.20
2	PER OWNER COMMENTS	03.16.20
1	PER OWNER COMMENTS	03.04.20

No.	Description	Date
△ - REVISIONS		

**BURGER KING**  
317 MAIN STREET  
MADISON, NJ 07940

CARROLLS, LLC  
SYRACUSE, NEW YORK

**ROOF PLAN & DETAILS**

PROFESSIONAL CERTIFICATION.  
I certify that these documents were prepared or approved by me, and that I am a duly licensed architect under the laws of the State of New Jersey, license number 18548.

ISSUED  
06.18.20  
LAUER-MANGUSO  
ASSOCIATES ARCHITECTS



**LAUER-MANGUSO & ASSOCIATES ARCHITECTS**  
4080 Ridge Lea Road  
Buffalo, N.Y. 14228  
(716) 837-0833

Date: 03.04.2020 Drawing No. A-7  
Drawn By: CJP  
Checked By: JWM  
Job Number: 19045